Para Mobility
Making everyday living easier

Phone 1300 444 600
Unit 31/276 New Line Rd
Dural NSW 2158 Australia
enquiries@paramobility.com.au
www.paramobility.com.au


Pelican Pool & Spa Hoist Measuring Guide

Customer Name _____ Phone _____

Pool Name _____

Install Address _____

Pelican Rim Setback (Aerial View)

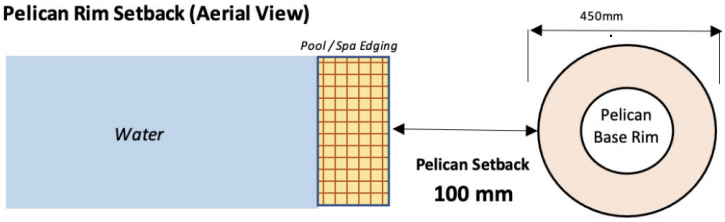

Pelican setback is the standard setback distance (100mm).

IMPORTANT NOTICE: WATER DEPTH

In accordance with the Disabilities Standards Code, Disability (Access to Premises – Buildings) Standards 2010 Part D5, the Pelican base rim must be positioned on the pool or spa surrounds where the **water depth is not less than 500mm and not more than 1300mm.**

Water depth at the point of entry (ie Pelican location) _____ mm (max 1300mm)

Which profile best matches your pool? ☐ A ☐ B ☐ C ☐ D ☐ E

Please include measurements in the profile you selected (see page 2).

Do you have the minimum concrete width & thickness to mount the hoist on pool deck? ☐ Y ☐ N

What is the thickness of the tiles or pavers on top of the concrete slab (if any)?_____ mm

TO SAFELY INSTALL the Pelican Pool & Spa Hoist you will need a FLAT AND LEVEL SOLID CONCRETE PAD to anchor it to. We recommend a minimum ⅓ of cubic metre of concrete is used when pouring your pad. This can be made up as a logical size, for example: 1000mm x 1000mm x 300mm but at a minimum must have a surface area of at least 650mm x 650mm & minimum depth of 100mm. The ideal location is placed up against the pool edge.

Which Dulux colour would you like?



☐ Pearl White Gloss ☐ Charcoal Metallic Pearl Gloss ☐ Silver Kinetic Pearl Satin ☐ Safety Yellow Gloss ☐ French Blue Gloss ☐ Primrose Gloss

What is the base substrate material the hoist will be installed on?

☐ Concrete Pad ☐ Tiles over Concrete ☐ Pavers over Concrete ☐ Timber Decking ☐ Other: _____

Property access considerations/risks? _____


Para Mobility
Making everyday living easier

Phone 1300 444 600
Unit 31/276 New Line Rd
Dural NSW 2158 Australia
enquiries@paramobility.com.au
www.paramobility.com.au

Pelican Pool & Spa Hoist Measuring Guide

ROUND MEASUREMENTS TO THE NEAREST 10MM


Profile A

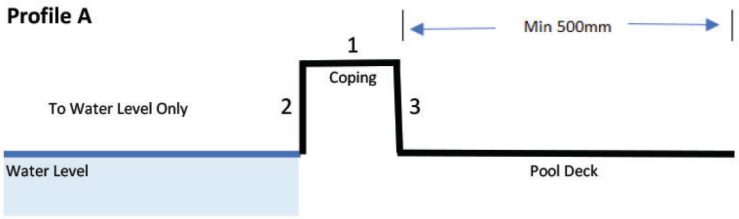

A1	Coping Width	
A2	Internal Riser	
A3	External Riser	


NOTE: Measurement 2 may be different to measurement 3.

Profile B

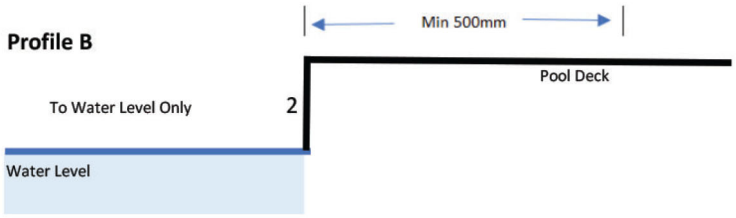

B2	Internal Riser	


Profile C

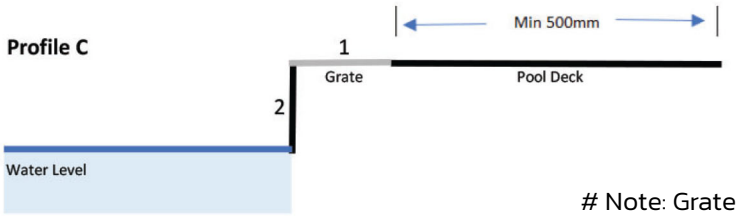

C1	Grate Width #	
C2	Internal Riser	

Note: Grate width is from pool edge to commencement of concourse.


Profile D

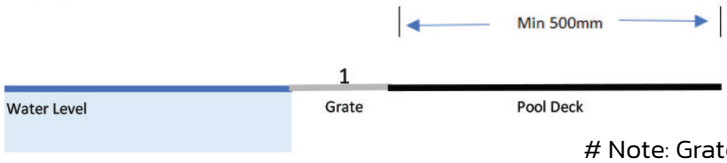

D1	Grate Width #	

Note: Grate width is from pool edge to commencement of concourse.

Profile E

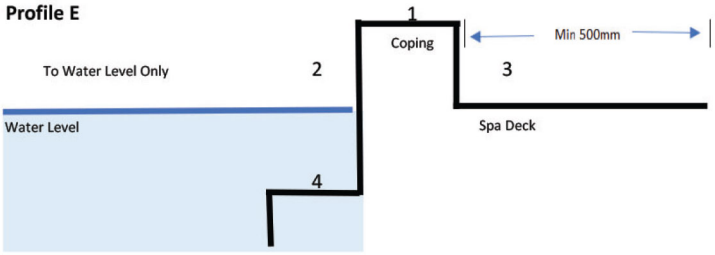

E1	Coping Width	
E2	Internal Riser	
E3	External Riser	
E4	Width of Spa Seat	

NOTE: Measurement 2 may be different to measurement 3.

Para Mobility
Making everyday living easier

Phone 1300 444 600
Unit 31/276 New Line Rd
Dural NSW 2158 Australia
enquiries@paramobility.com.au
www.paramobility.com.au

Pelican Pool & Spa Hoist
Platform Lift
Measuring Guide

PLATFORM ENTRY



LEFT



RIGHT

Which side of the pool will the platform lift be mounted to?

☐ LEFT

☐ RIGHT